

## **FERROTECH**


*The Galvanized Steel Spacer*

# **ROLLTECH**

ROLLTECH A/S - an Alu-Pro Group Company

The universal steel spacer called FERROTECH is suitable for use with corner keys and for bending on all known bending machines.

This spacer fulfils all requirements for the manufacturing of fire prevention glass and is of significant benefit to the stability, especially if it comes to larger frames.

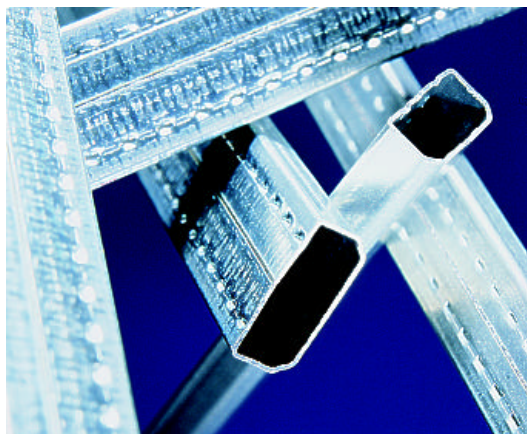


In comparison to aluminium the FERROTECH spacers have to be emphasized of their better thermal conductivity and less expansion.

Corner keys and straight connectors can be delivered ex stock.

On request the FERROTECH spacers can be delivered pre-assembled with straight connectors.

Painting on the visible surface in all RAL- and NCS-colours is possible on request.



Standard wall  
thickness  
0.38 mm

In Cavity  
12, 15 and 16  
also available in  
0.30 mm

### **Packaging (metre per unit) Length 6.000 mm**

Cavity	B in mm	H in mm	Stillage (container)	Carton
6	5.5	6.5	18.000	1.500
8	7.5	6,5	14.004	1.080
9	8.5	6.5	12.000	1.080
10	9.5	6,5	12.672	960
12	11.5	6,5	10.368	768
14	13.5	6,5	9.216	672
15	14.5	6.5	8.448	576
16	15.5	6,5	8.064	576
18	17.5	6,5	6.912	480
20	19.5	6,5	6.144	480
22	21.5	6.5	5.760	432
24	23.5	6,5	5.376	384